




Simplified installation guide Rieju MR300I 0/K00.160.9128

PROPRIETARY INFO: The documents and the information contained herein are proprietary and are not to be reproduced, used and disclosed to others for manufacture or for any other purpose except as specifically authorized.



- Step 1:** Secure the green part of the installation with the clamp; this marks the starting or zero position.
- Step 2:** Guide the installation through the same places as the installation you have removed.
- Step 3:** Choose whether you want to use the display ; if you do not want to use it, disconnect the cable and use plug 0/000.410.9125.
- Step 4:** Fit the second start button 0/000.720.9103.
- Step 5:** Fit the simplified light and stop switch on the right-hand side.



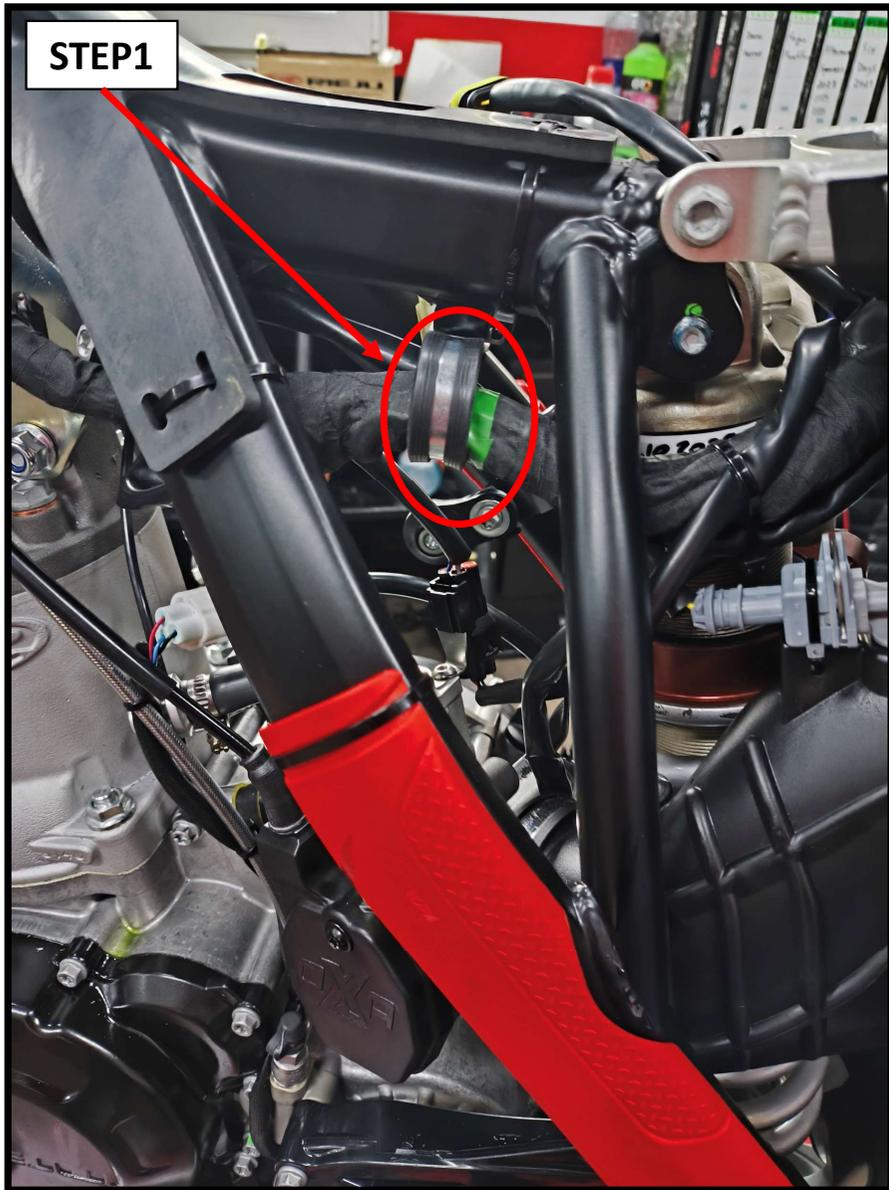

STEP4




STEP5



STEP5



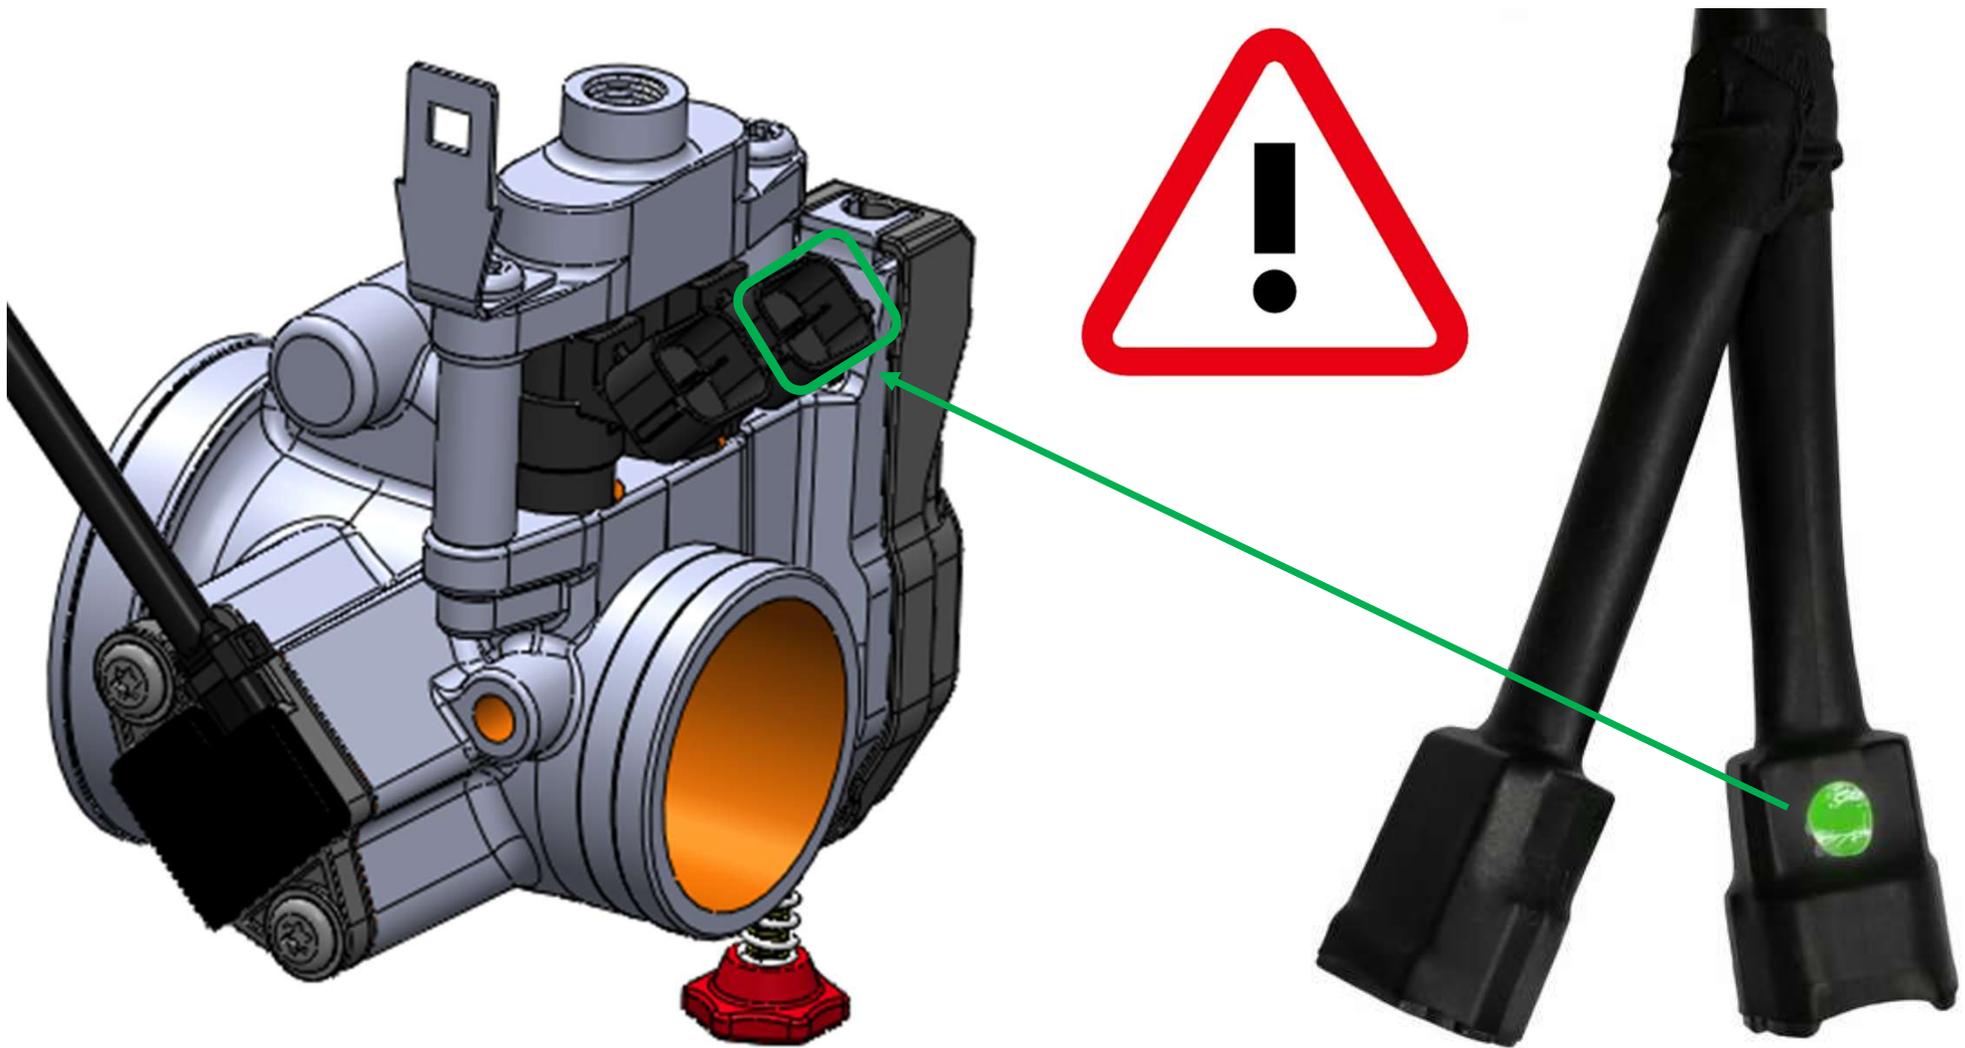



**Front brake
sensor
connector,
not to be
confused with
the position
light**