



- 1) Remove the fuel tank.
- 2) Drain the coolant.
- 3) Remove the LH radiator.
- 4) Remove the “Y” coolant hose assembly.



5) Pre-mount electric fan on the bracket.

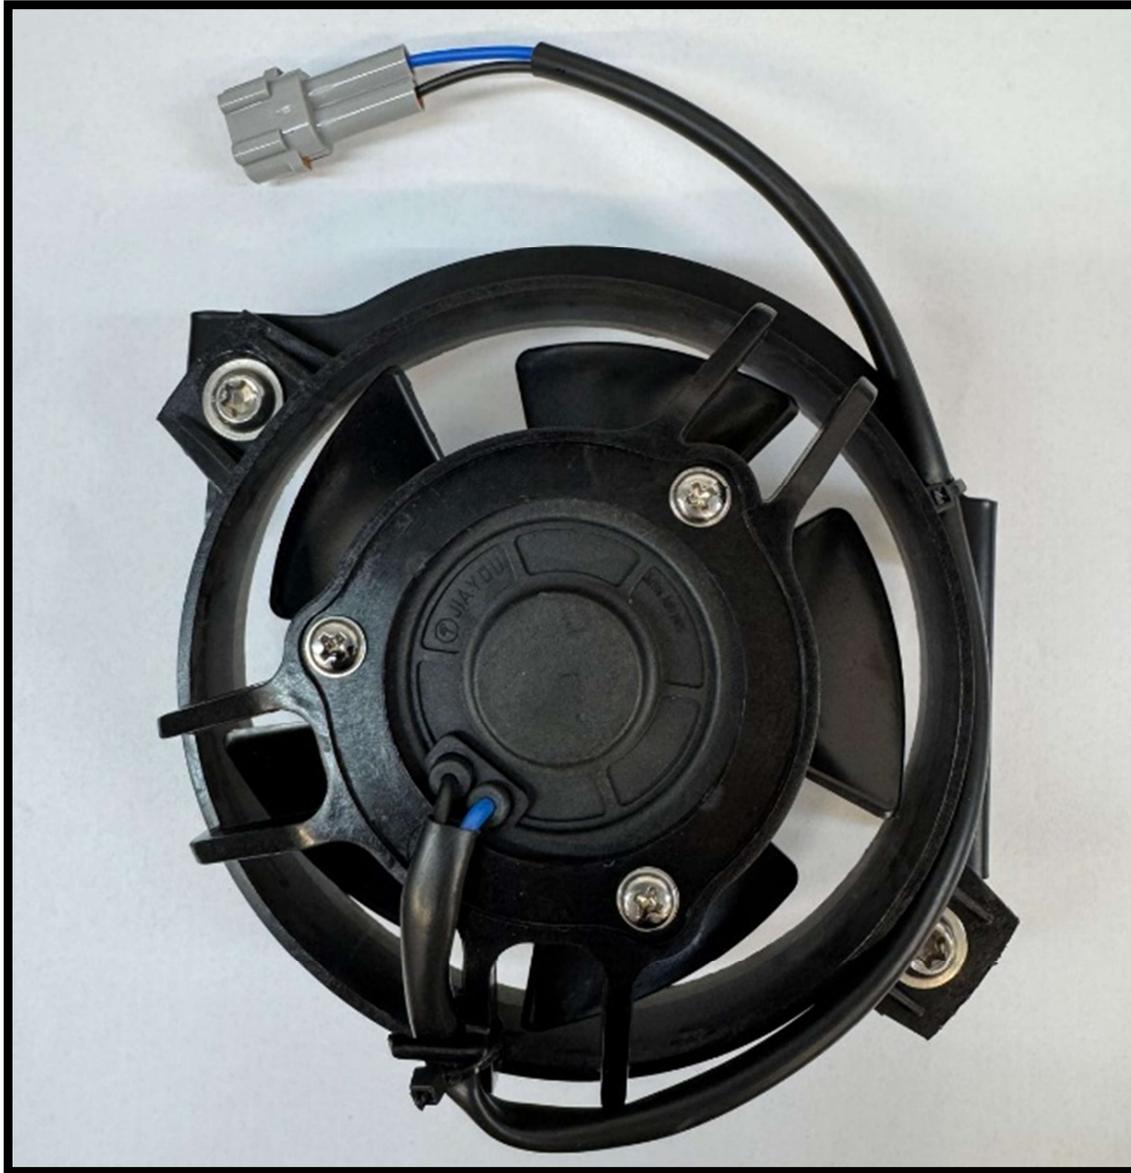

6) Position the electric fan at the bottom of the radiator and mark the holes.

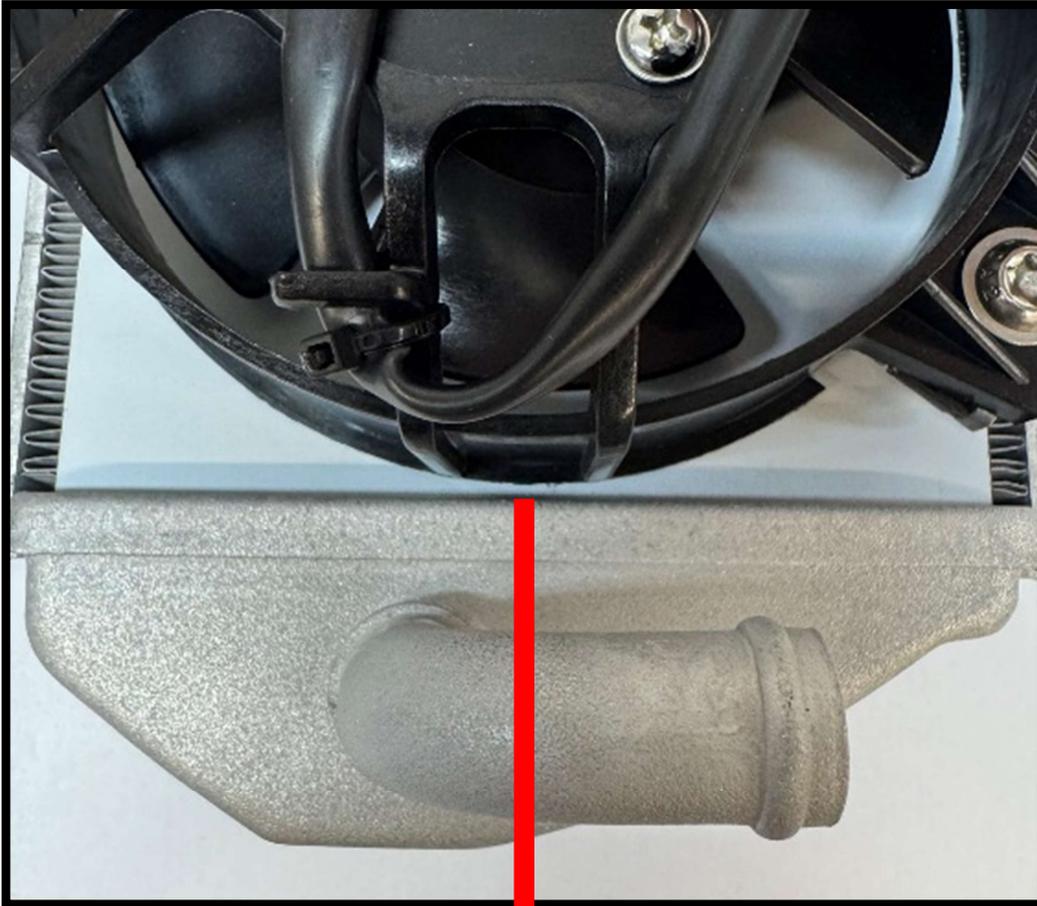

2 mm clearance between the radiator and the electric fan.




7) Prepare a 5mm diameter drill bit with a sleeve to ensure that the drill bit does not penetrate more than necessary.



4mm

- 8) Drill holes in the radiator without applying too much pressure to avoid damaging the cells.
- 9) Rivet the electric fan to the radiator.

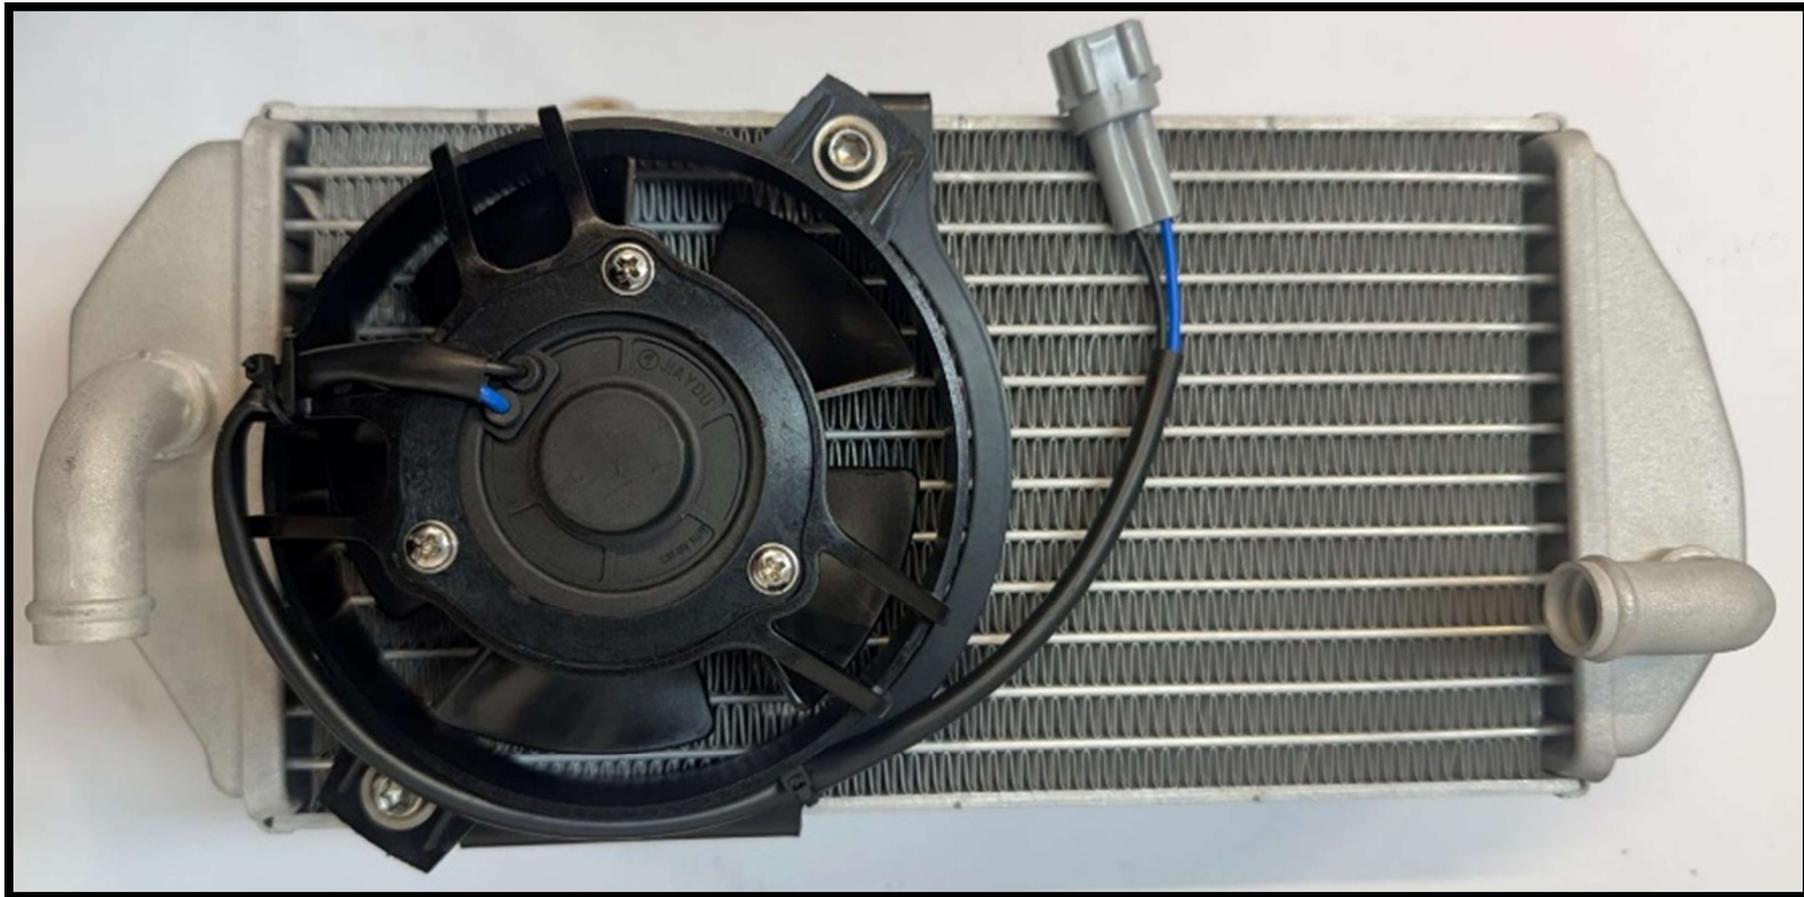


10) Install radiator on the motorcycle with the cooling pipes without the thermostat.



11) Connect the electric fan module to the electrical installation and secure it with a clamp.

MODULE CONNECTORS

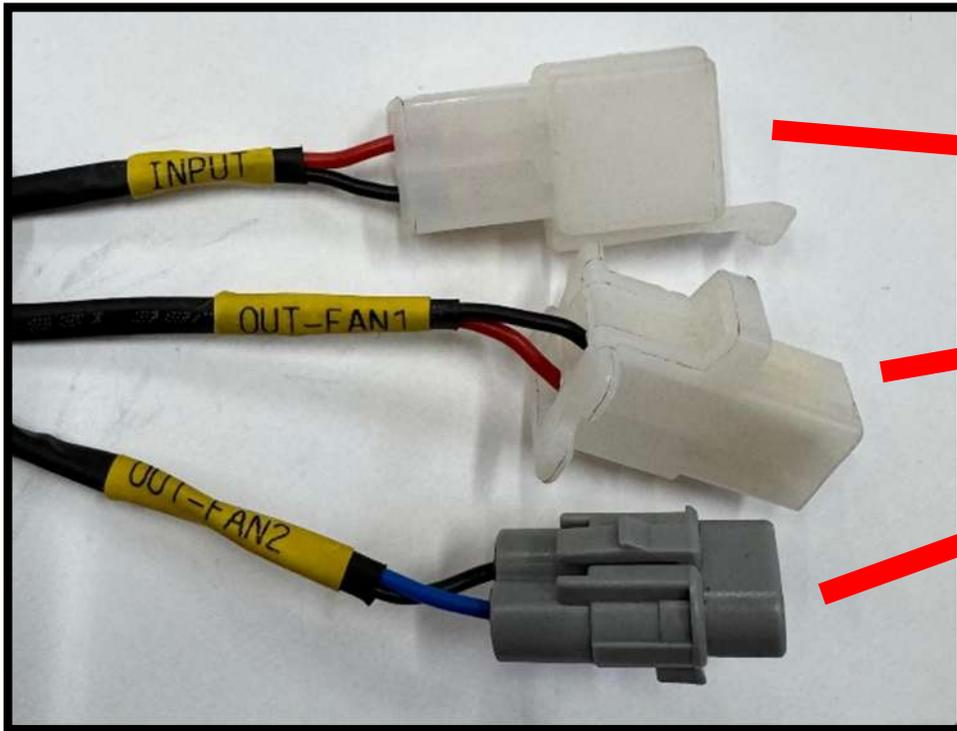

MAIN HARNESS

ELECTRIC FAN 1

ELECTRIC FAN 2





12) Fill the radiators with coolant.

