




EXPANSION TANK INSTRUCTIONS


MR300i 0/K00.030.9108



- 1) Remove the front fender, exhaust, and skid plate to facilitate installation.
- 2) Cover the cylinder opening to prevent dirt from entering.
- 3) Mark the point where the hole must be made with a center punch (13 mm).

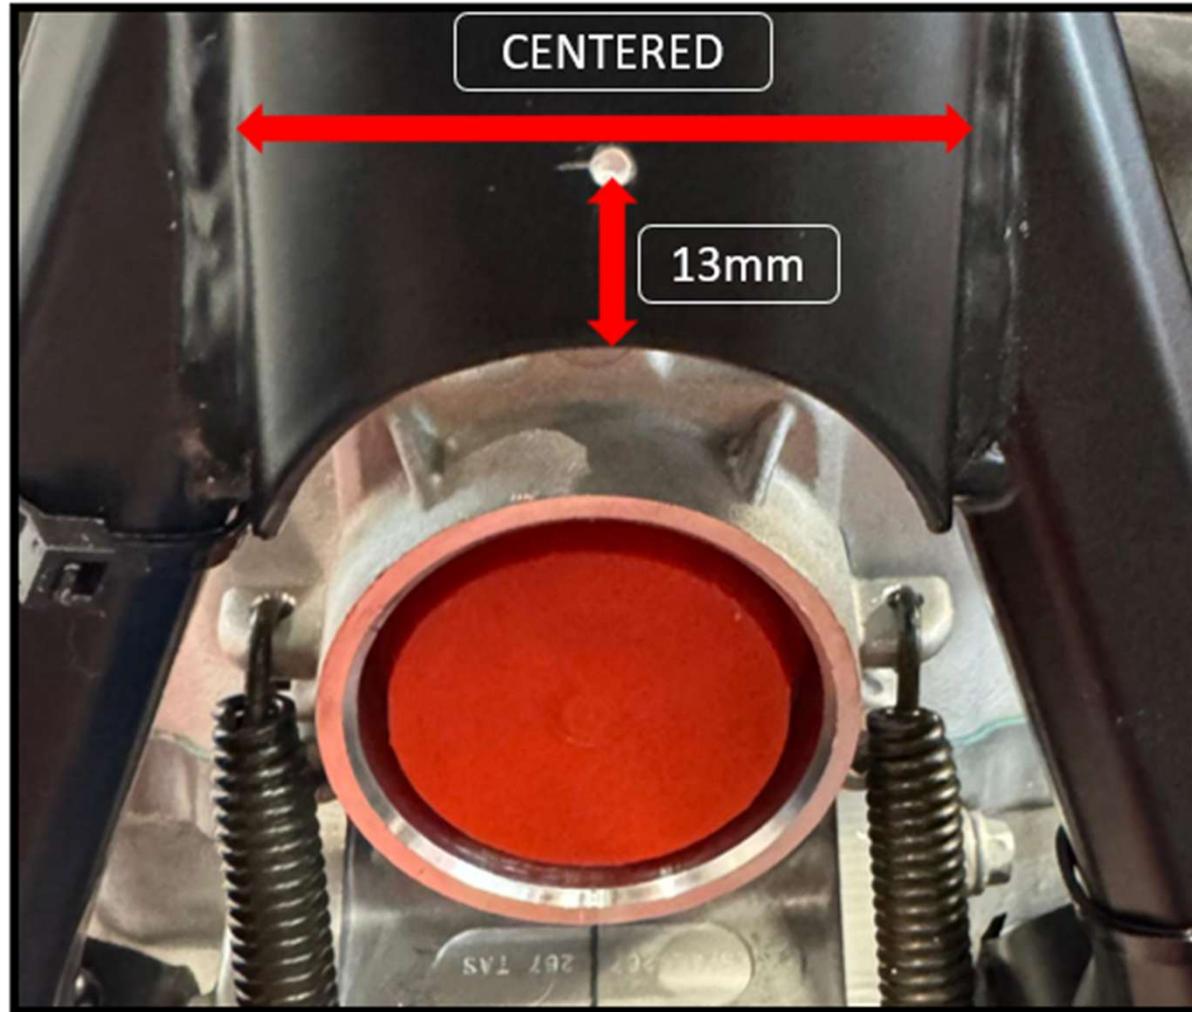


4) Hacer el hole con una drill bit de 6,25 mm.

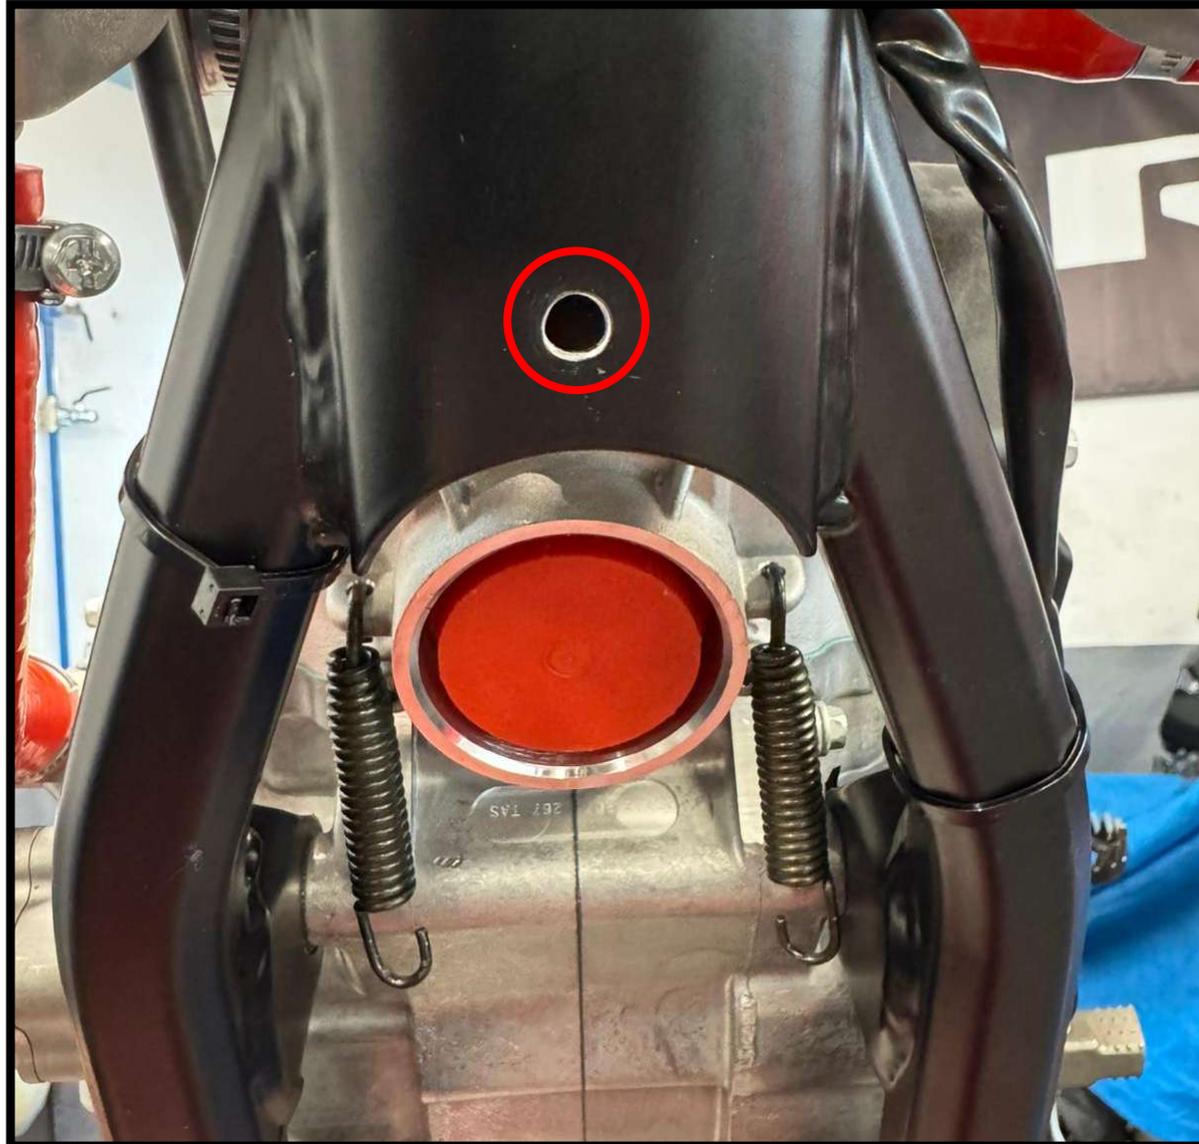

5) Pre-assemble the expansion tank.



6) **IMPORTANT NOTE:** Add 5 cm of coolant to the expansion tank.

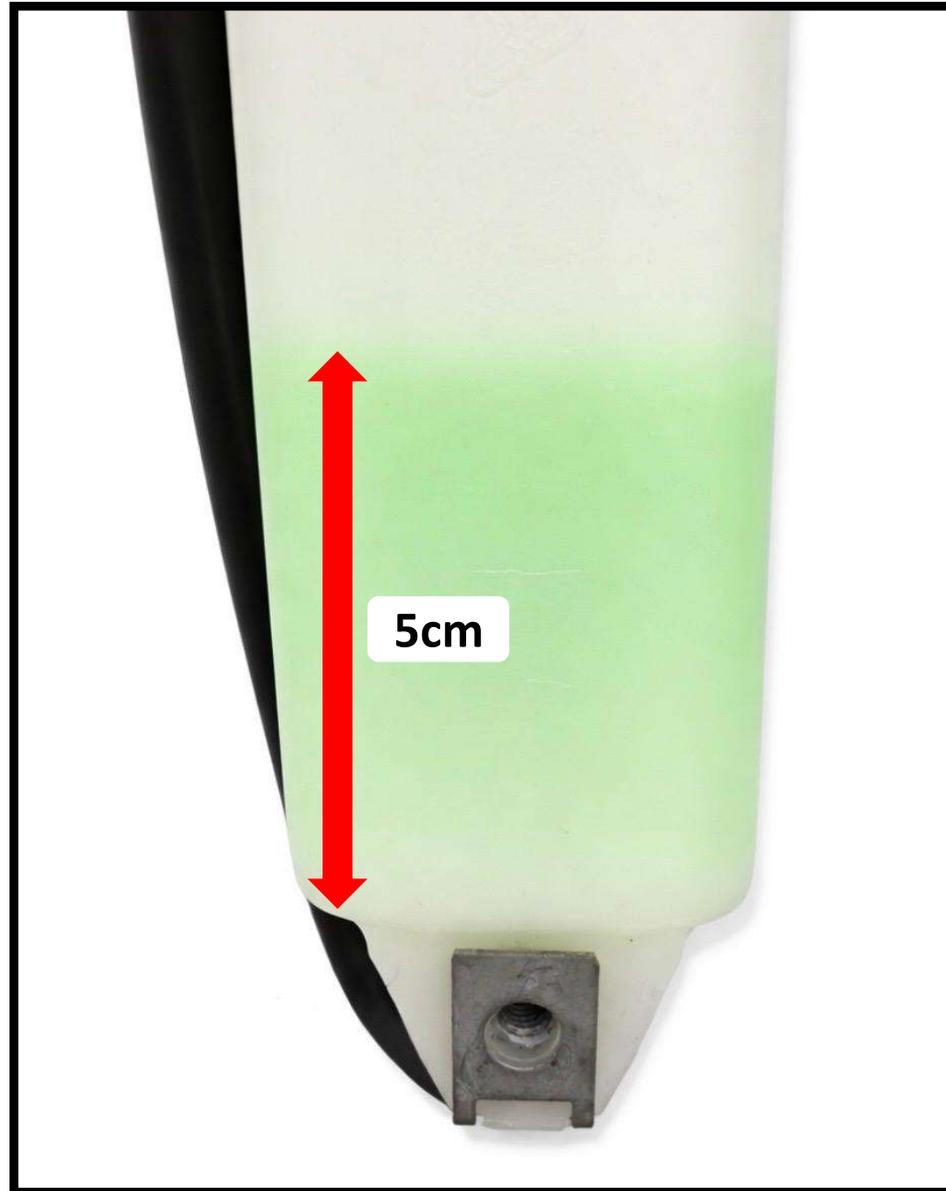

7) Place the expansion tank inside the frame.



8) Secure the expansion tank with the screw.



9) Connect the expansion tank tube to the radiator.

